

Jockimo

Advanced Architectural Products

Jockimo[®]


Advanced Architectural Products

UL Approved Anti-slip Glass Flooring

Jockimo is the only Underwriters Laboratories (UL) classified glass flooring product on the market. Our exclusive anti-slip GlassGrit™ and GlassFrit™ surfaces exceed ADA (Americans with Disabilities Act) requirements.

Jockimo is also the only glass flooring manufacturer that offers a monolithically polished edge on their fully tempered glass stair treads and flooring. Others may offer polishing but their glass is annealed and in our opinion not as safe.

Jockimo is the first and only to offer a scratch resistant walking surface. Jockimo also offers an ADA required contrasting strip on the nosing of stair treads and landings if required.

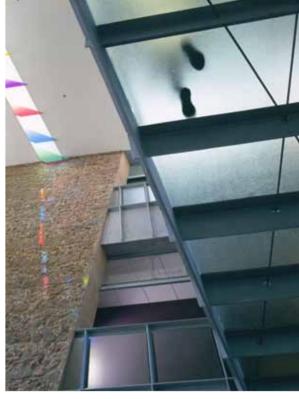



Anti-slip Glass Flooring







Crystal Clear[™]



 $\mathsf{Ultimate}\ \mathsf{Privacy}\ \mathsf{S}\text{-}\mathsf{Revo}^{^{\mathsf{TM}}}$



Ultimate Privacy Frost™



Jockimo, Inc. Phone: 949.251.0075 Fax: 949.251.0126









Jockimo, Inc. Phone: 949.251.0075 Fax: 949.251.0126 www.Jockimo.com










Phone: 949.251.0075 Fax: 949.251.0126

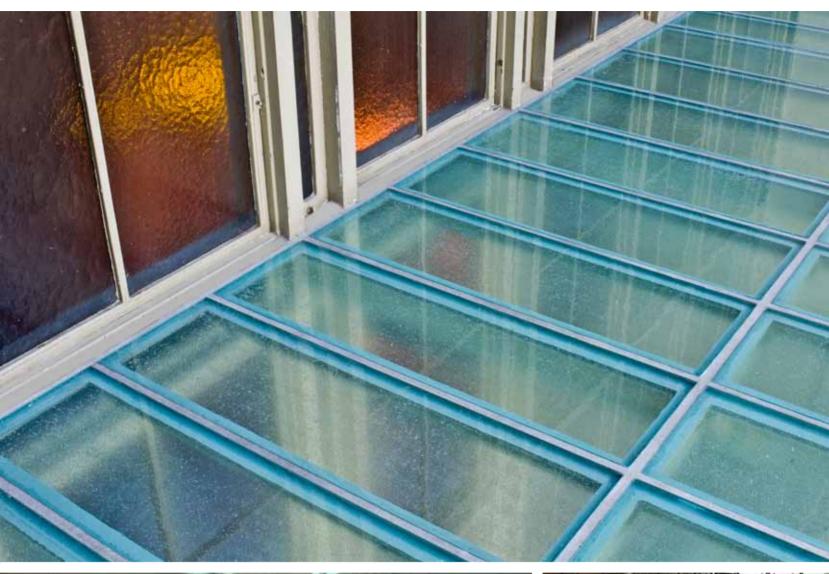











Phone: 949.251.1560 Fax: 949.251.0126 www.Jockimo.com











Jockimo, Inc. Phone: 949.251.1560 Fax: 949.251.0126

Jockimo Advanced Architectural Products





Jockimo, Inc. Phone: 949.251.1560 Fax: 949.251.0126 www.Jockimo.com











UL Approved Anti-slip Glass Treads

Jockimo is the Only Underwriters Laboratories (UL) tested and approved glass flooring product on the market. Our exclusive anti-slip Classic GlassGrit™ surface exceeds ADA (Americans with Disabilities Act) requirements.

Jockimo is also the only glass flooring manufacturer that offers a monolithically polished edge on their fully tempered glass stair treads and flooring. Others may offer polishing but their glass is annealed and in our opinion not safe.

Jockimo offers an ADA (Americans with Disabilities Act) required contrasting strip on the nosing of stair treads and landings if required. Jockimo is the only glass flooring manufacturer that can offer this Jockimo patent pending product.



Anti-slip Glass Treads














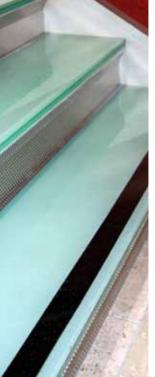



Crystal Clear™



 $\mathsf{Ultimate}\ \mathsf{Privacy}\ \mathsf{S}\text{-}\mathsf{Revo}^{\scriptscriptstyle\mathsf{TM}}$



 $Ultimate\ Privacy\ Frost^{^{\text{\tiny{TM}}}}$





















Jockimo, Inc.

Phone: 949.251.0075 Fax: 949.251.0126

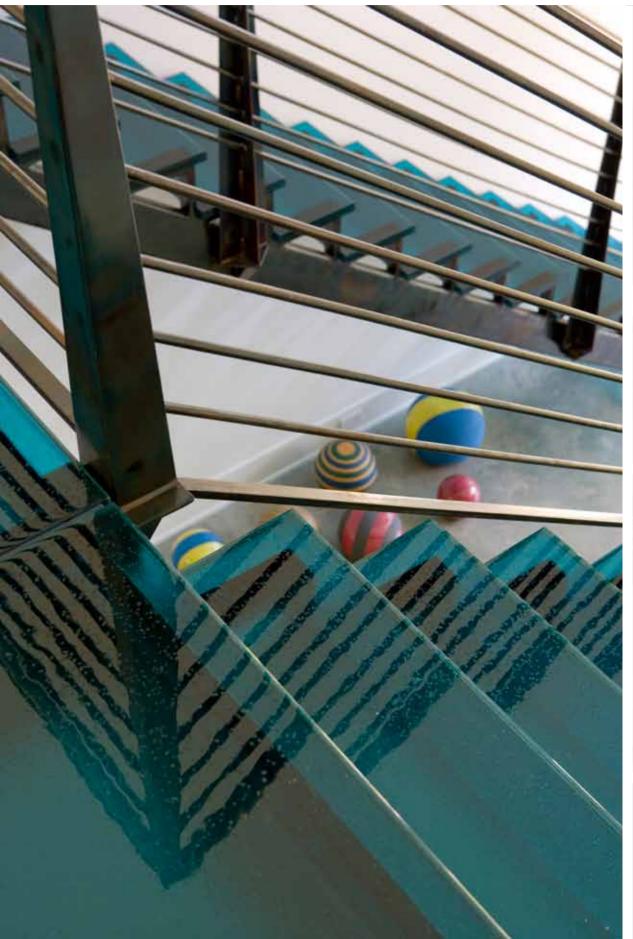








Jockimo, Inc. Phone: 949.251.0075 Fax: 949.251.0126 www.Jockimo.com





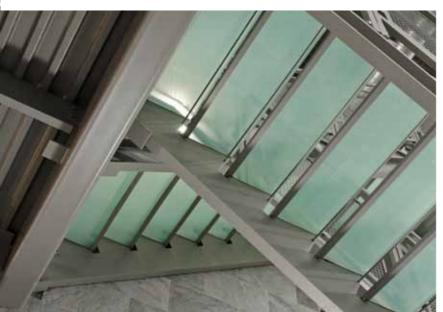

Phone: 949.251.0075 Fax: 949.251.0126 www.Jockimo.com




Jockimo


Advanced Architectural Products

Structural Support Methods

There are numerous options available to safely support glass flooring panels. Each project is different and in turn each project requires proper review to ensure safety. Our preferred support system is four-sided because of the high safety level involved — but this does not mean other options are not safe.








Technical Data

Sizes available: Each project is manufactured per the project specifications — in turn, all panels are custom made. (Standard sizes available.)


Thickness: Thickness and make-up varies by project. Once we review your project we can suggest a make-up for you. (The standard make-up is 3 lites of 3/8" glass for a total thickness of approx. 1-1/4".)


Product type: Laminated fully tempered glass is utilized for strength. Per the new ASTM code, all glass flooring products — both panels and treads — have to be made out of a minimum of 3 pieces of glass per panel.


Structural Support

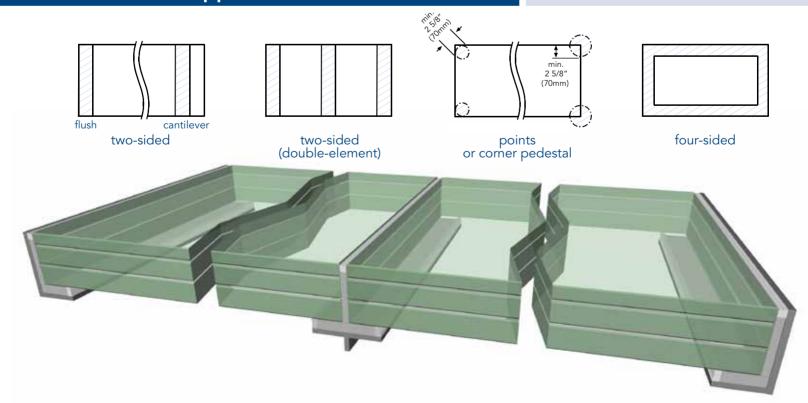



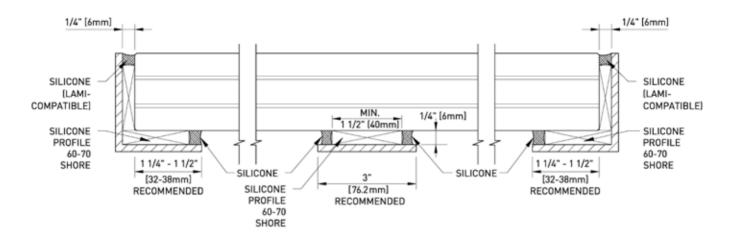

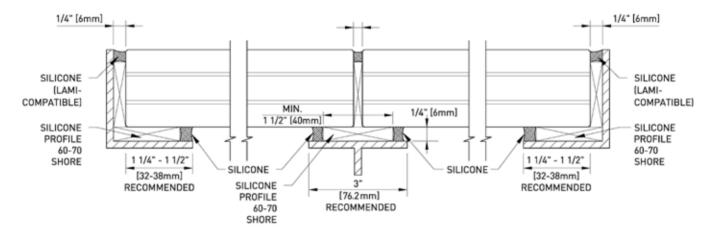

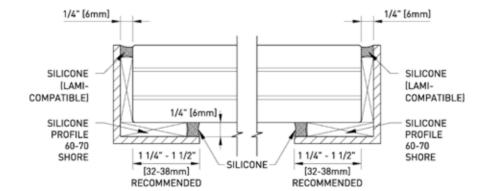

Phone: 949.251.0075 Fax: 949.251.0126 www.Jockimo.com

The silicone setting strips should be glued to the steel substructure before the glass is set. The silicone we recommend is a non-acidic clear silicone. Here is a list that we have tested as being safe and recommended:


- Dow Corning 995
- GE SCS 2800

The silicone setting blocks should be 60–70 shore. Various products can be used. CR Laurence has a product called PSB 250 which are 1/4" x various lengths. CR Laurence 1-800-421-6144. Other products will work as well.

There are two different ways to install setting blocks: 1.) Place a block every 6" - 12" around the perimeter of the support. 2.) Use a rubber/neoprene material that fully covers the support. The material can bet cut to size and set in place.

^{*} Please note—using any non-recommend silicone will void the glass warranty.









Flooring Surfaces

Jockimo is the only Underwriters Laboratories (UL) classified anti-slip glass flooring product on the market. Both of our exclusive anti-slip walking surfaces—GlassGrit™ & GlassFrit™—exceeds ADA (Americans with Disabilitites Act) requirements.












MULTIPLE OPTIONS AVAILABLE.

Available in Ultimate PrivacyTM, Crystal ClearTM, Privacy FrostTM, or Ultimate Privacy FrostTM in either our GlassGritTM or GlassFritTM anti-slip walking surfaces. Other options include glass colors, lamination colors, paint, custom frost, special lamination interlayers as well as custom textures.

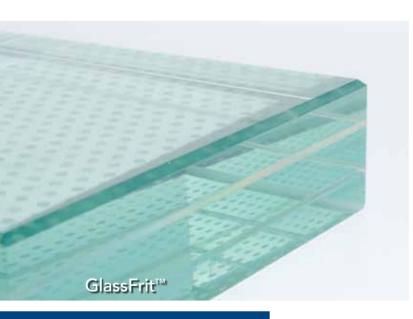



Jockimo, Inc. Phone: 949.251.0075 Fax: 949.251.0126 www.Jockimo.com

MONOLITHICALLY POLISHED EDGES.

Jockimo is the only glass flooring manufacturer that offers a monolithically polished edge on their fully tempered glass stair treads and flooring after laminating. Others may offer polishing but their glass is annealed and in our opinion, not as safe as fully tempered glass.

SCRATCH RESISTANT WALKING SURFACE

Jockimo is the first and only manufacturer to offer a permanent scratch resistant coating on the walking surface of their glass flooring.